

Texol NG Series Nitrogen Generators

Our range of high purity and low maintenance Nitrogen Generators that offer flexibility and outputs from 1 - 10L/min

Overview


Utilising Pressure Swing Adsorption technology the Texol NG series provides ideal performance, efficiency and reliability. High purity nitrogen is delivered as and when required. All models in the range are mobile to allow easy repositioning and installation under a workbench

The NG series provides flexibility to match your system requirements. We can customise the purity, flow rate and delivery pressure to suit your specifications.

Features and benefits

- Flow Rates from 1 to 10 litres/min
- High Purity nitrogen up to 99.9995%
- Stand-by Mode
- PSA technology
- Output Pressure 80 PSIG (5.4 Barg)
- Easy Installation
- Simple maintenance

How it works

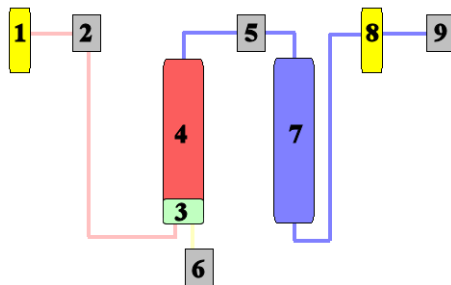

Air from an external source enters the generator via a 0.01-micron filter [1] that removes contaminants and bulk moisture via an integrated auto drain. When the control system assesses that more nitrogen is required, solenoid valve [2] is opened and the pressure is allowed to build in the column [4] containing Carbon Molecular Sieve (CMS) and a residue moisture catcher [3]. This sieve adsorbs the oxygen and leaves the dry nitrogen free to flow into the reservoir [7]. After this point, the Nitrogen is allowed to flow to the application via another 0.01-micron filter [8] and pressure and flow regulators [9].

Technical specifications

Model	NG 1	NG 2	NG 3	NG 5	NG 10
Flow L/min	1	2	3	5	10
Purity (% N ₂)	Up 99.9995% (5 ppm residual O ₂)				
Dew point (C PDP)	-40				
Outlet pressure (barg/PSIg)	5.4/80				
Inlet air requirements	20L/min at 7 bar / 100psi	38L/min at 7 bar / 100psi	38L/min at 7 bar / 100psi	38L/min at 7 bar / 100psi	130L/min at 7 bar / 100psi
Power without compressor	8.1W 110-230V				
Depth (mm/inch)	143 / 5.6	439 / 17.3	439 / 17.3	439 / 17.3	439 / 17.3
Height (mm/inch)	645 / 25.4	768 / 30.2	768 / 30.2	768 / 30.2	768 / 30.2
Width (mm/inch)	288 / 11.3	380 / 15.0	380 / 15.0	380 / 15.0	760 / 30.0
Weight (kg/lbs.)	14.5 / 32.0	73 / 161	73 / 161	73 / 161	146 / 322
Connection ports	Female ¼" BSPP				

Contact details

Texol Gasgen Ltd
 Unit 36 Elderpark workspaces
 ElderPark Street
 Glasgow
 Scotland
 G51 3TR

Tel: +44 (0) 141 530 7417

Email: sales@texol.co.uk

Web: www.texol.co.uk